


# DIN 6303

Knurled grip knobs

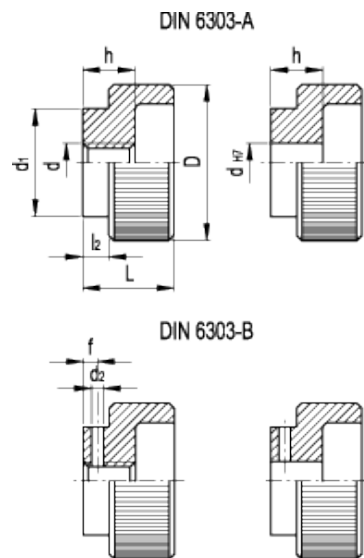

## technical informations

### Material

Black-oxide steel.

### Assembly

- Execution A: tapped or plain through hole without semi-machined threaded hole.
- Execution B: tapped or plain hole with semi-machined threaded hole.

Standard Elements	Main dimensions						Mounting hole			Weight	
	Description	D	L	$l_2$	$d_1$	$d_{2\ H11}$	f	d	$d_{\ H7}$		h
DIN 6303-M5-A	20	12	4	14	-	-	-	M5	-	7	17
DIN 6303-M5-B	20	12	4	14	1.5	2.5	-	M5	-	7	16
DIN 6303-B5-A	20	12	4	14	-	-	-	-	5	7	18

DIN 6303-B5-B	20	12	4	14	1.5	2.5	-	5	7	17
DIN 6303-M6-A	24	14	4	16	-	-	M6	-	8	30
DIN 6303-M6-B	24	14	4	16	1.5	2.5	M6	-	8	29
DIN 6303-B6-A	24	14	4	16	-	-	-	6	8	29
DIN 6303-B6-B	24	14	4	16	1.5	2.5	-	6	8	28
DIN 6303-M8-A	30	17	5	20	-	-	M8	-	10	50
DIN 6303-M8-B	30	17	5	20	2	3	M8	-	10	48
DIN 6303-B8-A	30	17	5	20	-	-	-	8	10	50
DIN 6303-B8-B	30	17	5	20	2	3	-	8	10	48
DIN 6303-M10-A	36	20	6	28	-	-	M10	-	12	90
DIN 6303-M10-B	36	20	6	28	3	4	M10	-	12	87
DIN 6303-B10-A	36	20	6	28	-	-	-	10	12	89
DIN 6303-B10-B	36	20	6	28	3	4	-	10	12	86
DIN 6303-M12-A	40	24	8	32	-	-	M12	-	16	124
DIN 6303-M12-B	40	24	8	32	4	4	M12	-	16	120
DIN 6303-B12-A	40	24	8	32	-	-	-	12	16	124
DIN 6303-B12-B	40	24	8	32	4	4	-	12	16	120



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE