

## Revolving handles

### SPECIFICATION

#### Types

- Type D: with plain shaft
- Type E: with threaded shaft

#### Steel **ST**

zinc plated, blue passivated

#### Aluminium **AL**

glossy finish

#### Plastic **KT**

Technopolymer (Polyamide PA)

- temperature resistant up to 110 °C
- black, matt finish

#### Spindle Steel

zinc plated, blue passivated




### INFORMATION

This handle is supplied unassembled so that the shaft can be press fitted or screwed into a tapped blind bore prior to assembly.

During mounting, easy blows with a soft hammer are sufficient to drive the handle into place.

### TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Plastic characteristics (see page A2)

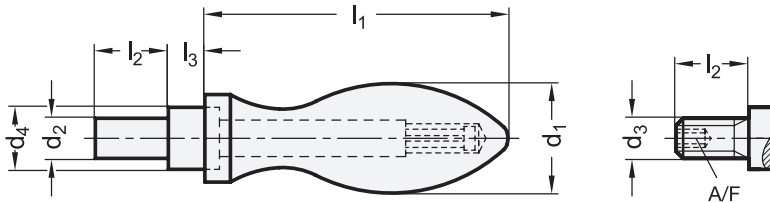

\* Complete with material of the Revolving handles (ST, AL or KT)

ST	AL	KT
Steel	Aluminium	Plastic

### DIN 98

Description	d1	d2 h8	d3	d4 h13	l1 ≈	l2	l3	A/F	⚖
DIN 98-*-16-D	16	7	-	10	49	11	5.5	3	33
DIN 98-*-20-D	20	8	-	13	61	13	6	4	63
DIN 98-*-25-D	25	10	-	16	75	14	8	5	110
DIN 98-*-32-D	32	13	-	20	95	21	10.5	6	217
DIN 98-*-36-D	36	16	-	22	106	26	11	8	321
DIN 98-*-16-E	16	-	M 6	10	49	11	5.5	3	33
DIN 98-*-20-E	20	-	M 8	13	61	13	6	4	50
DIN 98-*-25-E	25	-	M 10	16	75	14	8	5	110
DIN 98-*-32-E	32	-	M 12	20	95	21	10.5	6	240
DIN 98-*-36-E	36	-	M 16	22	106	26	11	8	299

Weight AL

