

GN 565

Cabinet "U" handles

Aluminium



Specification

Aluminium

plastic coated

black, RAL 9005, textured finish **SW**

black, RAL 9005, UV-resistant, textured finish **SWU**

red, RAL 3000, textured finish **RS**

silver, RAL 9006, textured finish **SR**

white, RAL 9016, antimicrobial **WSA**

anodized, natural colour **EL**

blank, tumbled **BL**

Information

GN 565 cabinet „U“ handles are made from a bent aluminum profile and have excellent stability and ergonomic design. Due to the production process, special designs can be supplied even in relatively small quantities.

In addition to the standard surfaces, these cabinet „U“ handles are also available with a functional coating.

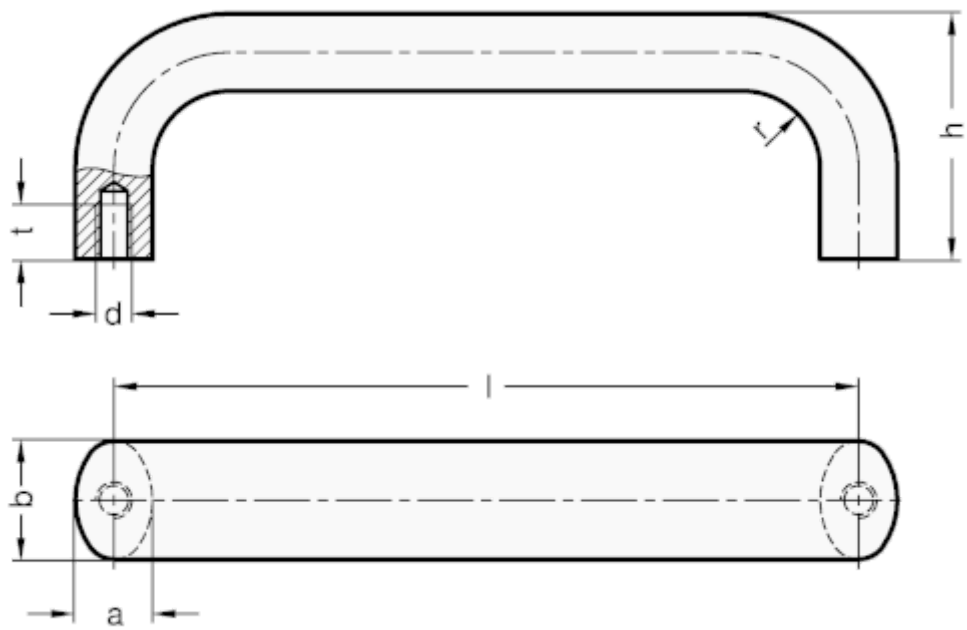
The **SWU** version is coated with a highly weather-resistant and UV-protective powder coating system, making this version excellent for outdoor use.







The **WSA** version has a powder coating based on zinc molybdate, which gives it antimicrobial properties. The principle of action, which is activated by the presence of moisture, demonstrably reduces the growth of viruses, bacteria, and fungi within 24 hours, so that contaminated surfaces ultimately have less than 0.2% of the original number of microbes.

Standard elements with antimicrobial plastic coating are primarily used in the health care sector and in public buildings, such as airports, train stations, stadiums, etc.

Technical information

- [Load rating information](#)



	Anodized, natural colour	Anodized
	Black (RAL 9005)	Black
	Black, UV-resistant	Black_uv_resistent
	Blank	Blank
	Red (RAL 3000)	Red
	Silver (RAL 9006)	Silver
	White (RAL 9016)	White_RAL_9016

GN 565

Description	b	l ±0.25	a	d	h	r	t min.	Weight
GN 565-20-100-BL	20	100	13	M 6	49	13	10	90
GN 565-20-100-EL	20	100	13	M 6	49	13	10	80
GN 565-20-100-RS	20	100	13	M 6	49	13	10	87
GN 565-20-100-SR	20	100	13	M 6	49	13	10	91
GN 565-20-100-SW	20	100	13	M 6	49	13	10	90
GN 565-20-100-SWU	20	100	13	M 6	49	13	10	92
GN 565-20-112-BL	20	112	13	M 6	49	13	10	100
GN 565-20-112-EL	20	112	13	M 6	49	13	10	97
GN 565-20-112-RS	20	112	13	M 6	49	13	10	97
GN 565-20-112-SR	20	112	13	M 6	49	13	10	97
GN 565-20-112-SW	20	112	13	M 6	49	13	10	95
GN 565-20-112-SWU	20	112	13	M 6	49	13	10	99
GN 565-20-112-WSA	20	112	13	M 6	49	13	10	93
GN 565-20-117-BL	20	117	13	M 6	49	13	10	100
GN 565-20-117-EL	20	117	13	M 6	49	13	10	100
GN 565-20-117-RS	20	117	13	M 6	49	13	10	100
GN 565-20-117-SR	20	117	13	M 6	49	13	10	100
GN 565-20-117-SW	20	117	13	M 6	49	13	10	100
GN 565-20-117-SWU	20	117	13	M 6	49	13	10	100
GN 565-20-120-BL	20	120**	13	M 6	49	13	10	105
GN 565-20-120-EL	20	120**	13	M 6	49	13	10	107
GN 565-20-120-RS	20	120**	13	M 6	49	13	10	102
GN 565-20-120-SR	20	120**	13	M 6	49	13	10	102
GN 565-20-120-SW	20	120**	13	M 6	49	13	10	104
GN 565-20-120-SWU	20	120**	13	M 6	49	13	10	104
GN 565-20-128-BL	20	128	13	M 6	51	13	10	103
GN 565-20-128-EL	20	128	13	M 6	51	13	10	110
GN 565-20-128-RS	20	128	13	M 6	51	13	10	109
GN 565-20-128-SR	20	128	13	M 6	51	13	10	110
GN 565-20-128-SW	20	128	13	M 6	51	13	10	109
GN 565-20-128-SWU	20	128	13	M 6	51	13	10	110
GN 565-20-128-WSA	20	128	13	M 6	51	13	10	103
GN 565-20-160-BL	20	160	13	M 6	51	13	10	121
GN 565-20-160-EL	20	160	13	M 6	51	13	10	120
GN 565-20-160-RS	20	160	13	M 6	51	13	10	127
GN 565-20-160-SR	20	160	13	M 6	51	13	10	128
GN 565-20-160-SW	20	160	13	M 6	51	13	10	120
GN 565-20-160-SWU	20	160	13	M 6	51	13	10	128
GN 565-20-160-WSA	20	160	13	M 6	51	13	10	121
GN 565-20-180-BL	20	180**	13	M 6	51	13	10	139
GN 565-20-180-EL	20	180**	13	M 6	51	13	10	200
GN 565-20-180-RS	20	180**	13	M 6	51	13	10	2
GN 565-20-180-SR	20	180**	13	M 6	51	13	10	138
GN 565-20-180-SW	20	180**	13	M 6	51	13	10	128
GN 565-20-180-SWU	20	180**	13	M 6	51	13	10	128
GN 565-20-180-WSA	20	180**	13	M 6	51	13	10	150
GN 565-20-200-BL	20	200	13	M 6	51	13	10	149
GN 565-20-200-EL	20	200	13	M 6	51	13	10	151
GN 565-20-200-RS	20	200	13	M 6	51	13	10	150
GN 565-20-200-SR	20	200	13	M 6	51	13	10	150
GN 565-20-200-SW	20	200	13	M 6	51	13	10	150
GN 565-20-200-SWU	20	200	13	M 6	51	13	10	172
GN 565-20-235-BL	20	235**	13	M 6	51	13	10	20
GN 565-20-235-EL	20	235**	13	M 6	51	13	10	180
GN 565-20-235-RS	20	235**	13	M 6	51	13	10	172
GN 565-20-235-SR	20	235**	13	M 6	51	13	10	180
GN 565-20-235-SW	20	235**	13	M 6	51	13	10	180
GN 565-20-235-SWU	20	235**	13	M 6	51	13	10	161
GN 565-20-235-WSA	20	235**	13	M 6	51	13	10	164
GN 565-26-112-BL	26	112	17	M 8	55	17	12	166
GN 565-26-112-EL	26	112	17	M 8	55	17	12	160
GN 565-26-112-RS	26	112	17	M 8	55	17	12	160
GN 565-26-112-SR	26	112	17	M 8	55	17	12	167
GN 565-26-112-SW	26	112	17	M 8	55	17	12	166
GN 565-26-112-SWU	26	112	17	M 8	55	17	12	166
GN 565-26-117-BL	26	117	17	M 8	55	17	12	175
GN 565-26-117-EL	26	117	17	M 8	55	17	12	166
GN 565-26-117-RS	26	117	17	M 8	55	17	12	166
GN 565-26-117-SR	26	117	17	M 8	55	17	12	166
GN 565-26-117-SW	26	117	17	M 8	55	17	12	171
GN 565-26-117-SWU	26	117	17	M 8	55	17	12	171
GN 565-26-120-BL	26	120**	17	M 8	55	17	12	171
GN 565-26-120-EL	26	120**	17	M 8	55	17	12	171

GN 565-26-120-RS	26	120**	17	M 8	55	17	12	171
GN 565-26-120-SR	26	120**	17	M 8	55	17	12	171
GN 565-26-120-SW	26	120**	17	M 8	55	17	12	180
GN 565-26-120-SWU	26	120**	17	M 8	55	17	12	180
GN 565-26-125-BL	26	125	17	M 8	55	17	12	176
GN 565-26-125-EL	26	125	17	M 8	55	17	12	180
GN 565-26-125-RS	26	125	17	M 8	55	17	12	178
GN 565-26-125-SR	26	125	17	M 8	55	17	12	178
GN 565-26-125-SW	26	125	17	M 8	55	17	12	180
GN 565-26-125-SWU	26	125	17	M 8	55	17	12	180
GN 565-26-128-BL	26	128	17	M 8	55	17	12	180
GN 565-26-128-EL	26	128	17	M 8	55	17	12	183
GN 565-26-128-RS	26	128	17	M 8	55	17	12	180
GN 565-26-128-SR	26	128	17	M 8	55	17	12	180
GN 565-26-128-SW	26	128	17	M 8	55	17	12	180
GN 565-26-128-SWU	26	128	17	M 8	55	17	12	210
GN 565-26-128-WSA	26	128	17	M 8	55	17	12	200
GN 565-26-160-BL	26	160	17	M 8	57	17	12	160
GN 565-26-160-EL	26	160	17	M 8	57	17	12	220
GN 565-26-160-RS	26	160	17	M 8	57	17	12	210
GN 565-26-160-SR	26	160	17	M 8	57	17	12	217
GN 565-26-160-SW	26	160	17	M 8	57	17	12	210
GN 565-26-160-SWU	26	160	17	M 8	57	17	12	234
GN 565-26-160-WSA	26	160	17	M 8	57	17	12	234
GN 565-26-179-BL	26	179	17	M 8	57	17	12	240
GN 565-26-179-EL	26	179	17	M 8	57	17	12	234
GN 565-26-179-RS	26	179	17	M 8	57	17	12	240
GN 565-26-179-SR	26	179	17	M 8	57	17	12	234
GN 565-26-179-SW	26	179	17	M 8	57	17	12	240
GN 565-26-179-SWU	26	179	17	M 8	57	17	12	244
GN 565-26-192-BL	26	192	17	M 8	57	17	12	245
GN 565-26-192-EL	26	192	17	M 8	57	17	12	259
GN 565-26-192-RS	26	192	17	M 8	57	17	12	240
GN 565-26-192-SR	26	192	17	M 8	57	17	12	246
GN 565-26-192-SW	26	192	17	M 8	57	17	12	240
GN 565-26-192-SWU	26	192	17	M 8	57	17	12	315
GN 565-26-192-WSA	26	192	17	M 8	57	17	12	340
GN 565-26-300-BL	26	300	17	M 8	57	17	12	350
GN 565-26-300-EL	26	300	17	M 8	57	17	12	340
GN 565-26-300-RS	26	300	17	M 8	57	17	12	330
GN 565-26-300-SR	26	300	17	M 8	57	17	12	352
GN 565-26-300-SW	26	300	17	M 8	57	17	12	345
GN 565-26-300-SWU	26	300	17	M 8	57	17	12	490
GN 565-26-300-WSA	26	300	17	M 8	57	17	12	440
GN 565-26-400-BL	26	400	17	M 8	57	17	12	445
GN 565-26-400-EL	26	400	17	M 8	57	17	12	440
GN 565-26-400-RS	26	400	17	M 8	57	17	12	500
GN 565-26-400-SR	26	400	17	M 8	57	17	12	440
GN 565-26-400-SW	26	400	17	M 8	57	17	12	538
GN 565-26-400-SWU	26	400	17	M 8	57	17	12	538
GN 565-26-500-BL	26	500	17	M 8	57	17	12	538
GN 565-26-500-EL	26	500	17	M 8	57	17	12	538
GN 565-26-500-RS	26	500	17	M 8	57	17	12	538
GN 565-26-500-SR	26	500	17	M 8	57	17	12	538
GN 565-26-500-SW	26	500	17	M 8	57	17	12	538
GN 565-26-500-SWU	26	500	17	M 8	57	17	12	538

** suitable for 19" rack and enclosure layout